


760168377 | 3291B SLT C6A 4/23 F/UTP R1000



Paragon Network Services are the best structured cabling integrator in INDIA



GigaSPEED X10D® 3291B Category 6A F/UTP Cable, low smoke zero halogen, slate jacket, 4 pair count, 1000 ft (305 m) length, reel

## Product Classification

**Regional Availability**

Asia | Australia/New Zealand | EMEA | Latin America

**Portfolio**

SYSTIMAX®

**Product Type**

Twisted pair cable

**Product Brand**

GigaSPEED X10D®

## General Specifications

**Product Number**

3291B

**ANSI/TIA Category**

6A

**Cable Component Type**

Horizontal

**Cable Type**

F/UTP (shielded)

**Conductor Type, singles**

Solid

**Conductors, quantity**

8

**Drain Wire Type** Solid **Jacket Color** Slate

**Pairs, quantity**

4

**Separator Type**

Isolator

**Transmission Standards**


ANSI/TIA-568.2-D

# 760168377 | 3291B SLT C6A 4/23 F/UTP R1000

## Dimensions

<b>Cable Length</b>	304.8 m   1000 ft
<b>Diameter Over Jacket, nominal</b>	7.518 mm   0.296 in
<b>Jacket Thickness</b>	0.508 mm   0.02 in
<b>Conductor Gauge, singles</b>	23 AWG
<b>Drain Wire Gauge</b>	26 AWG

## Cross Section Drawing

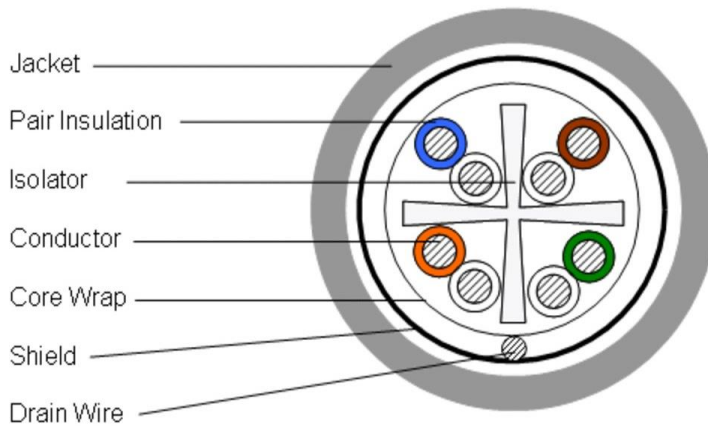

## Electrical Specifications

<b>dc Resistance Unbalance, maximum</b>	4 %
<b>dc Resistance, maximum</b>	8 ohms/100 m   2.438 ohms/100 ft
<b>Mutual Capacitance at Frequency</b>	5.6 nF/100 m @ 1 kHz
<b>Nominal Velocity of Propagation (NVP)</b>	68 %
<b>Operating Frequency, maximum</b>	500 MHz
<b>Operating Voltage, maximum</b>	80 V
<b>Remote Powering</b>	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO /IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A
<b>Segregation Class</b>	c

---

# 760168377 | 3291B SLT C6A 4/23 F/UTP R1000

## Material Specifications

<b>Conductor Material</b>	Bare copper
<b>Drain Wire Material</b>	Tinned copper
<b>Insulation Material</b>	Polyolefin
<b>Jacket Material</b>	Low Smoke Zero Halogen (LSZH)
<b>Separator Material</b>	Polyolefin
<b>Shield (Tape) Material</b>	Polyester/Aluminum shield

## Mechanical Specifications

<b>Pulling Tension, maximum</b>	11.34 kg   25 lb
---------------------------------	------------------

## Environmental Specifications

<b>Installation temperature</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Operating Temperature</b>	-20 °C to +60 °C (-4 °F to +140 °F)
<b>Acid Gas Test Method</b>	IEC 60754-2
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	Dca
<b>EN50575 CPR Cable EuroClass Smoke Rating</b>	s2
<b>EN50575 CPR Cable EuroClass Droplets Rating</b>	d2
<b>EN50575 CPR Cable EuroClass Acidity Rating</b>	a1
<b>Environmental Space</b>	Low Smoke Zero Halogen (LSZH)
<b>Flame Test Method</b>	IEC 60332-3-22
<b>Smoke Test Method</b>	IEC 61034-2

## Packaging and Weights

<b>Cable weight</b>	52.309 kg/km   35.15 lb/kft
<b>Packaging Type</b>	Reel

---

760168377 | 3291B SLT C6A 4/23 F/UTP R1000

## Regulatory Compliance/Certifications

Agency	Classification
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant

